


Welcome to explore the remote control functions of the PMR-171.

Step 1: confirm that the device firmware has been updated to the latest version 3.7.6. (Press and hold the Menu key to access the About page.)



Step 2: connect the unit to the local network via the Ethernet port.

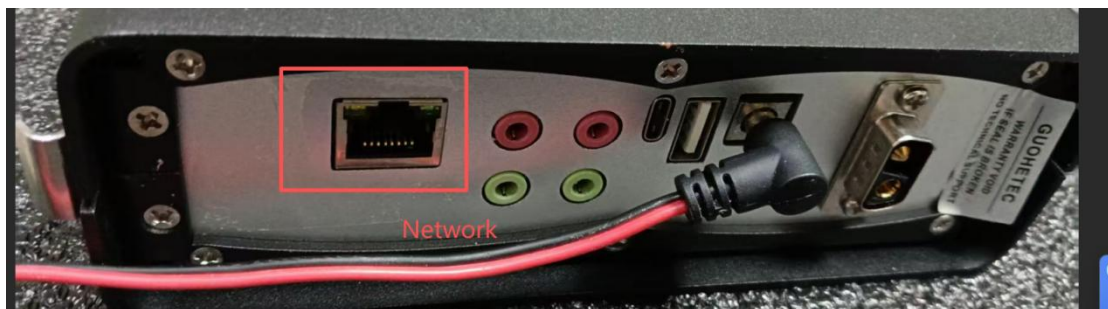




Warm Reminder: Power the radio as shown. Do NOT use a charger to supply power to the radio.

Step 3: Long press Menu → Enter Network

These two options must be configured to match the IP of your local LAN. Most units support automatic detection.



When "Success!" appears at the bottom right of this interface, it indicates that the network connection is successful.

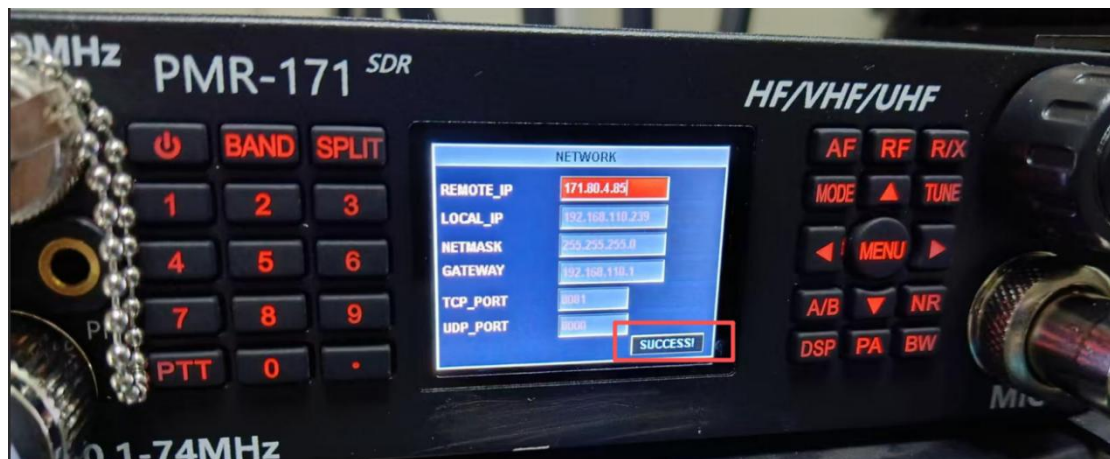


Step 4: Now access the webpage: (You need to activate your VPN in advance.)

<http://wavelink.guohedz.com>

PC login and mobile login are available. The operation steps are the same for both PC and mobile.

If you haven't registered an account, click Register Now. Registered users can log in directly.

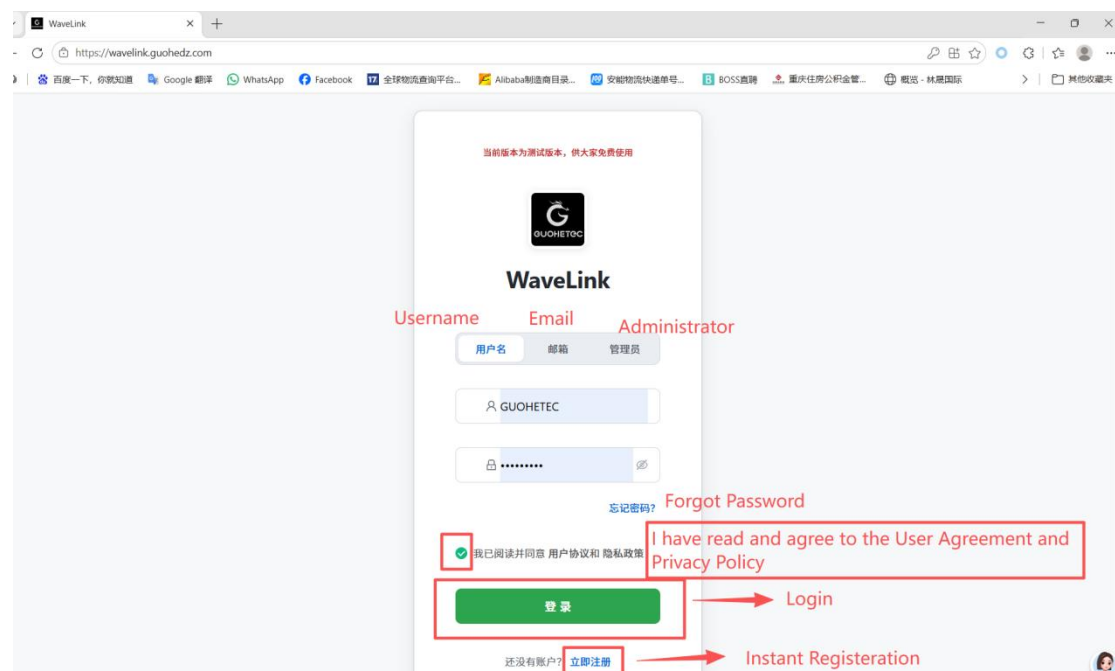

Step 5: After login → Click Add Now




Step 6: You can select two device types: Radio and Power Amplifier. Click Confirm.





Step 7: Input SN code for device binding

Note: If selecting Radio, press and hold Menu on the main unit to access the About page and obtain the SN code.

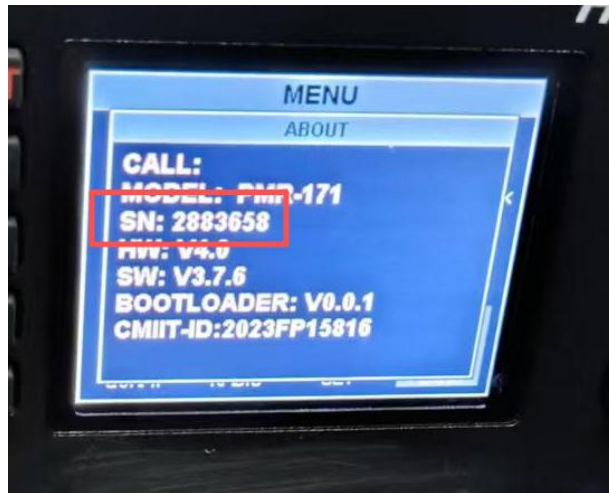

Finally, click the connected device to enter the remote control interface.

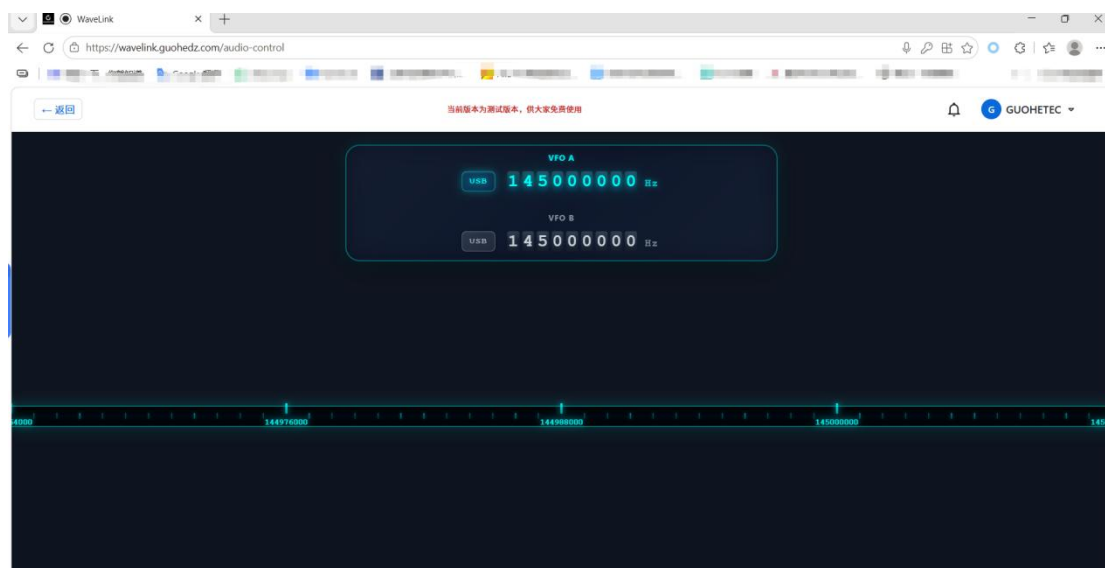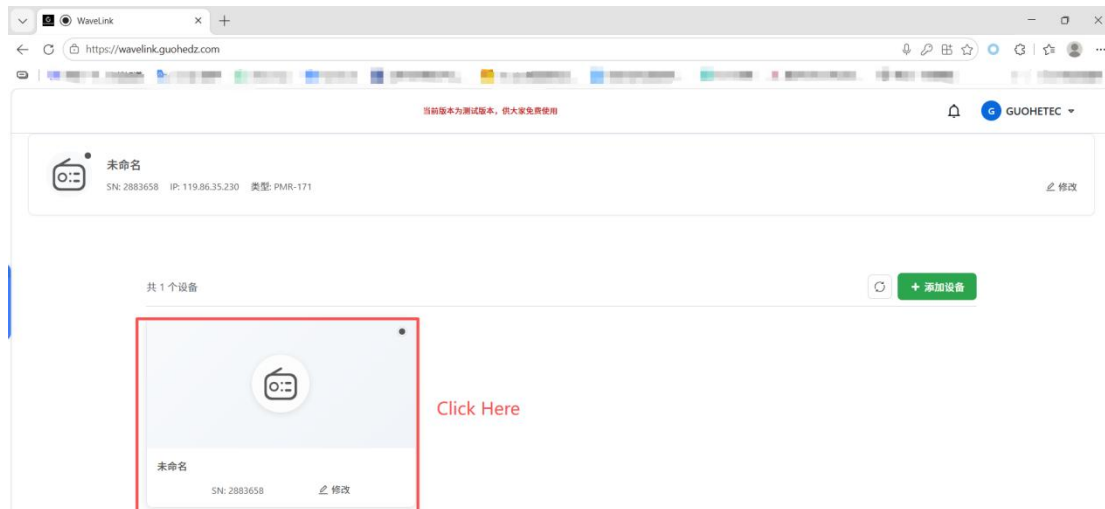

Enjoy your Radio

service@guohedz.com

+86 19562473440

GUOHETEC